

SIEMENS

Ingenuity for life



Scan QR
code to know
more about
NXAirS 12 kV



Air-Insulated Medium-Voltage Switchgear NXAirS, up to 12 kV

Medium-Voltage Switchgear

Catalog
HA 1702
Edition 2020 A

[siemens.com/NXAirS](https://www.siemens.com/NXAirS)

Application

Typical application



Air-insulated medium-voltage switchgear NXAirS is used in transformer and switching substations, mainly at the primary distribution level, e.g.:

Application

Public power supply

- Power supply companies
- Energy producers
- System operators.



Application

Industry and offshore

- Automobile industry
- Traction power supply systems
- Mining industry
- Lignite open-cast mines
- Chemical industry
- Diesel power plants
- Electrochemical plants
- Emergency power supply installations
- Textile, paper and food industries
- Iron and steel works
- Power stations
- Petroleum industry
- Offshore installations
- Petrochemical plants
- Pipeline installations
- Data centers
- Shipbuilding industry
- Steel industry
- Rolling mills
- Cement industry



Air-Insulated Medium-Voltage Switchgear NXAirS, up to 12 kV

Medium-Voltage Switchgear

Catalog HA 1702 · 2020 A

[siemens.com/NXAirS](https://www.siemens.com/NXAirS)

Application	Page
Typical applications	2
Customer benefit	
Ensures peace of mind	4
Saves lives	5
Increases productivity	6
Saves money	7
Preserves the environment	8
Design	
Classification	9
Basic panel design, operation	10
Compartment	11
Components	
Vacuum circuit-breaker	12
Vacuum contactor	13
Current transformers	14
Voltage transformers	15
Low-voltage compartment	16
SIQuench arc quenching device	17
Technical data	
Electrical data	18
Product range, switchgear panels	18 - 25
Dimensions	26
Room planning	27
Typical for IP41/42	28
Transport and packing	29
Standards	
Standards, specifications, guidelines	30 - 31

The products and systems described in this catalog are manufactured and sold according to a certified management system (acc. to ISO 9001, ISO 14001 and BS OHSAS 18001).

Customer benefit

Ensures peace of mind



For power supply companies and industrial plants, the platform concept of the NXAirS family introduced at all production locations has very concrete advantages:

Smooth operation,
exemplary availability and
optimal safety.

Features

- No handling of insulating gas and low and high pressure monitoring required
- As insulating medium, air is always available
- Factory-assembled, type-tested switchgear according to IEC 62271-200 , GB 3906 and DL/T 404
- Platform concept introduced worldwide, centrally controlled development, local manufacture
- Use of standardized block-type current transformers
- Use of standard components available worldwide, locally manufactured components, under consideration of regional standards
- More than 510,000 air-insulated switchgear panels of Siemens in operation worldwide
- Use of maintenance-free vacuum circuit-breakers or contactors
- Type testing of the vacuum circuit-breaker, the vacuum contactor and the make-proof earthing switch in the panel
- Pressure-resistant partitions
- Flexibility regarding the low-voltage equipment (removable compartment, plug-in wires)
- Quality assurance in accordance with DIN EN ISO 9001



All switchgear types of the NXAirS family are approved with internal arc classification IAC A FLR, loss of service continuity category LSC 2B and partition class PM.

This makes them suitable for universal installation, meeting the highest requirements regarding personal safety.


In addition the arc quenching device SIQuench can be selected for protection beyond the standards.

Features

- All operations with closed high-voltage door including manual operation of vacuum circuit-breaker
- Metallic enclosure, earthed shutters and partitions
- Internal arc classified switchgear according to IAC A FLR (front, lateral and rear accessibility) for all short-circuit currents and an arc duration of 1 s
- Loss of service continuity category LSC 2B (separate partitions for busbar, connection and switching-device compartments)
- Partition class PM (metal-clad in pressure-resistant design)
- Unambiguous position indicators and control elements on the high-voltage door
- Use of Siemens 3AE vacuum circuit-breakers or 3TM contactors
- Standard degree of protection IP4X; different degrees of protection possible as an option
- Positively driven shutters (separately lockable)
- Logical mechanical interlocking system
- Optional available arc quenching device SIQuench

Customer benefit

Increases productivity

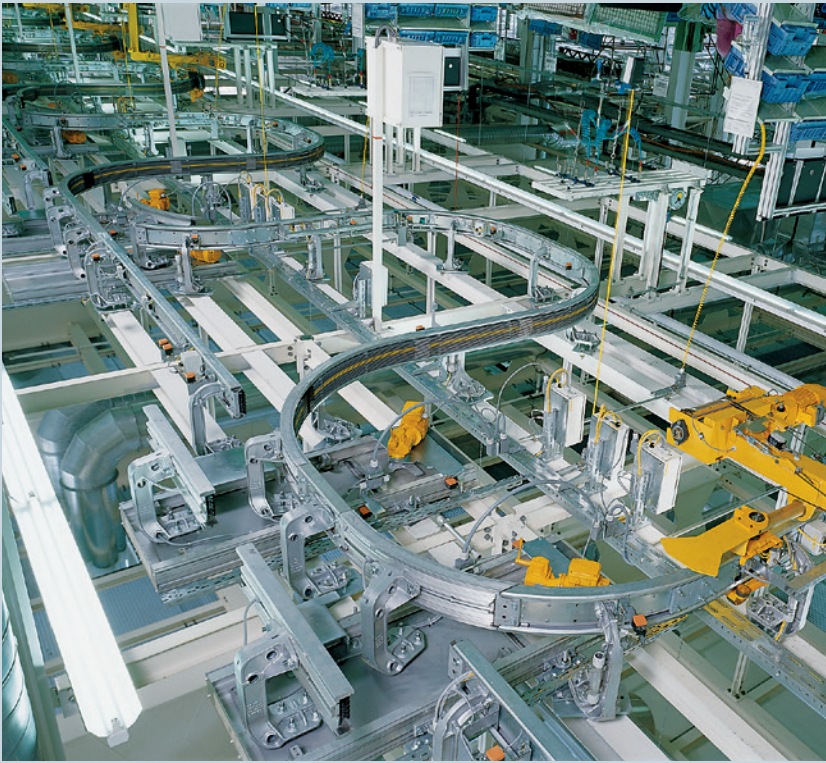

Properties such as modular design, type tests of the switching devices in the switchgear, confinement of an internal arc to the respective compartment, and thus maximum operational reliability, contribute to optimum operation and a remarkable increase of productivity.

Features

- Loss of service continuity category LSC 2B
- Partition class PM
- Positively driven shutters
- Use of standardized block-type current transformers
- Cable testing without isolating the busbar
- Functions such as establishment of the isolating distance, as well as feeder and busbar earthing, can be completely controlled from remote
- Confinement of an internal arc to the respective compartment
- Use of maintenance-free Siemens 3AE vacuum circuit-breakers or 3TM contactors
- Control cables in metallic wiring ducts
- Easy access to panel components



The compact design of the NXAirS family pays twice for owners due to the use of the Siemens 3AE vacuum circuit-breaker.

On the one hand, building costs can be reduced in this way, and on the other hand, the maintenance-free circuit-breakers and the modular design enable continuous operation without expensive shutdown times.

In case of an unlikely event of an internal arc, the optional available arc quenching device SIQuench reduces the system repair time from days and weeks to hours and minutes.

Features

- Use of maintenance-free Siemens 3AE vacuum circuit-breakers or 3TM contactors
- Interruption of operation reduced to a minimum by logical mechanical interlocking system
- Minimized space requirements (reduced building investments) due to compact design and flexible cable connection options and/or flexible pressure relief duct systems
- Optional arc quenching device SIQuench

Customer benefit

Preserves the environment



Air used as insulating medium, local production locations with short transportation ways and times, as well as a service life of more than 30 years, optimize the total energy balance.

Features

- As insulating medium, air is absolutely neutral to the environment
- Local production presence in all regions, minimized energy consumption regarding transport
- Service life of more than 30 years optimizes the energy balance additionally
- The materials used are fully recyclable without special knowledge
- Easy disposal

Circuit-breaker switchgear NXAirS is factory-assembled, type-tested, metal-enclosed and metal-clad switchgear for indoor installation according to IEC 62271-200, GB 3906 and DL/T 404 and corresponds to the following classifications.



Loss of service continuity category and partition class	
Loss of service continuity category	LSC 2B
Partition class	PM
Accessibility to compartments	Tool-based
Busbar compartment	Interlock-controlled
Switching-device compartment	Interlock-controlled or tool-based
Connection compartment	Interlock-controlled or tool-based
Internal arc classifications	
The following internal arc classifications are fulfilled: IAC A FLR, I_{sc} , t	
IAC	= Internal arc classification
A	= 300 mm distance of indicators for test (installation in closed electrical service location)
F	= Front arrangement of indicators for test
L	= Lateral arrangement of indicators for test
R	= Rear arrangement of indicators for test
I_{sc}	= Test current up to 40 kA
t	= Arc duration 1 s
In this way, NXAirS switchgear is suitable for unrestricted application (wall- or free-standing arrangement) in electrical service locations up to the maximum short-circuit ratings.	

National approval GOST

By certification in the system GOST R in Russia, NXAirS switchgear is approved for application at the voltage levels up to 12 kV.

Compliance with the requirements of the GOST standard has been confirmed in the declaration.

The approval is valid in the countries Russia, Belarus, Kazakhstan and Ukraine.

Design

Basic panel design, operation

Operation at the panel

Features

- Integrated mimic diagram
- Indication of the respective switch positions for circuit-breaker CLOSED/OPEN, disconnected position, earthing switch CLOSED/ OPEN, on the integrated mimic diagram
- Unambiguous assignment of actuating openings and control elements to the corresponding position indicators
- All switching operations only with high-voltage door closed
- Ergonomically favorable height for all control and indicator elements
- Option: Verification of safe isolation from supply for feeder or busbar by means of the capacitive voltage detecting system with panel front closed.


Interlocks

- Interlocking conditions specified according to IEC 62271-200 and GB 3906 are fulfilled
- Feeder earthing switch can only be operated with switching device in disconnected position and test position
- Switching device can only be racked on the movable part with the associated switching device OPEN position and with earthing switch OPEN
- Switching device can only be operated in interlocked disconnected or service or test position.

Beyond the specifications of the standards

- Coding prevents insertion of switching devices with a lower rated normal current into panels with a higher rated normal current
- Interlocking between the high-voltage door and the position of the withdrawable part
- Option: Electromagnetic interlocks, mechanical key interlocking systems and padlocks.

Basic panel design (example of circuit-breaker panel)

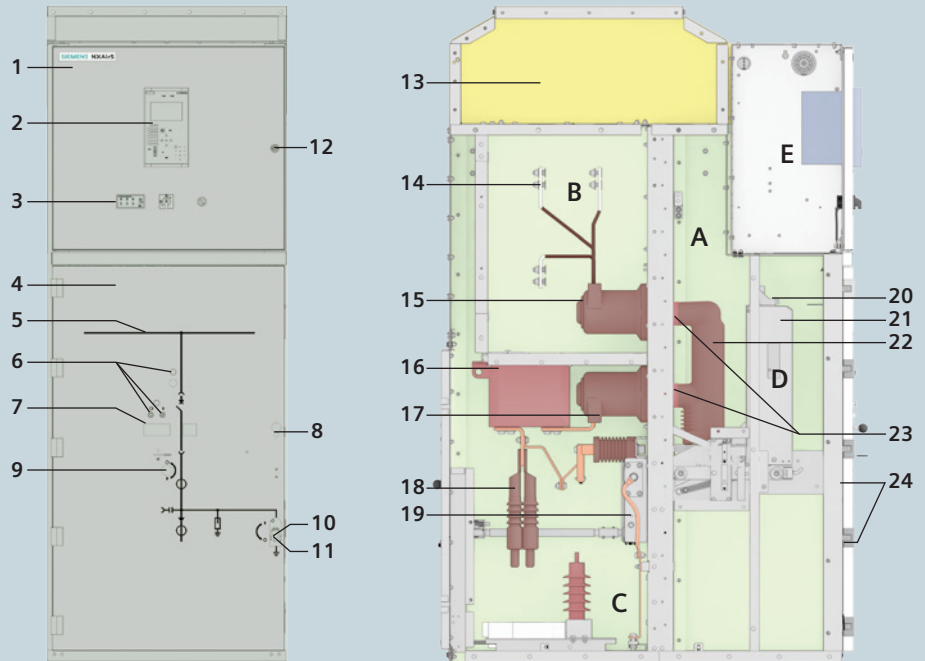

1 Door to low-voltage compartment

2 Protection device

3 Option: Voltage presence indicator

4 High-voltage door

5 Mimic diagram

6 "CLOSE-OPEN" actuating openings for the circuit-breaker, opening for spring charging

7 Inspection window to recognize the "CLOSED-OPEN" indicator of the circuit-breaker, "closing spring charged" indicator, operations counter

8 Handle for opening the high-voltage door

9 Actuating opening for racking the switching device

10 Mechanical position indicator for feeder earthing switch

11 Actuating opening for feeder earthing switch, manual or optionally motor operation

12 Door lock of LV compartment

13 Pressure relief duct, if required with top-mounted arc absorber

14 Busbars

15 Bushing-type insulator

16 Block-type current transformer

17 Bushing-type insulator

18 Cable connection

19 Make-proof earthing switch

20 Low-voltage connection, plug-in type

21 Operating and interlocking unit for circuit-breaker

22 Vacuum interrupters

23 Contact system

24 Operating and interlocking unit for racking the switching device and for earthing, manual or optionally motor operation

A Switching-device compartment

B Busbar compartment

C Connection compartment

D Withdrawable circuit-breaker

E Low-voltage compartment

Switching-device compartment

- Enclosure made of sendzimir-galvanized sheet steel
- Pressure relief upwards
- Panel front powder-coated with epoxy resin
- Standard color RAL 7035
- Separate shutter mechanism for opening and closing the
 - Busbar compartment
 - Connection compartment
- Metallic shutters can be opened and locked separately
- High-voltage door pressure-resistant in the event of internal arcs in the panel
- Pressure-resistant partitions to connection and busbar compartments
- Lateral metallic wiring duct for laying the control cables
- Low-voltage plug connector for connection of control cables between primary part and secondary part
- Switching-device compartment for the different panel versions with withdrawable devices:
 - Vacuum circuit-breaker
 - Vacuum contactor
 - Disconnecter link
 - Metering unit
 - Load-break switch and fuse combination equipment
- Endurance classes for:
 - Circuit-breaker: E2, M2, C2
 - Withdrawable part: M0, manually or partly motor-operated for withdrawable circuit-breaker and disconnecter link
 - Vacuum contactor: 1,000,000 times for non-latching
200,000 times for latching

Busbar compartment

- Enclosure made of sendzimir-galvanized sheet steel
- Pressure relief upwards
- Transverse partition from panel to panel
- Busbars made of flat copper, bolted from panel to panel
 - Option: Insulated
- Pressure-resistant partitions to connection and switching-device compartment
- Shutters can be opened and locked separately
- Bushing-type insulators for supporting the busbars and for accommodating the upper fixed contacts for the switching device
 - Option: Coupling electrode for voltage presence indicator

Additional compartments (option) for busbar components, see also product range

- Top-mounted compartment over the busbar compartment, within the pressure relief duct
- Separate pressure relief of the additional compartment via pressure relief flaps
- Options: Possibility of installing the following components (but not for panels with natural and forced ventilation, see also product range)
 - Voltage transformers
 - Make-proof earthing switch (endurance class: M1, E1), manual or optionally motor operation
 - Bar or cable connection
 - SIQuench arc quenching device

Connection compartment

- Enclosure made of sendzimir-galvanized sheet steel
- Pressure relief upwards through rear pressure relief duct
- Pressure-resistant partitions to switching-device and busbar compartments
- Earthing busbar
- Option: Installation of bushing-type insulators or block-type current transformers
- Option: Coupling electrode for capacitive voltage presence indicator
- Pressure-resistant floor cover
- Connection from front/bottom, or from rear/bottom, or from rear/top
- Suitable for connection of:
 - Single-core XLPE cables up to 4 x 500 mm² depending on the rated normal current and other built-in components
 - Three-core XLPE cables 3 x 240 mm² per panel depending on the rated normal current and other built-in components
 - Flat copper bars with bushings in a base plate or fully-insulated bars including floor cover
- Installation of voltage transformers
 - Cast-resin insulated
 - 3 x 1-pole
 - Fixed-mounted, without primary fuses or optional with primary fuses
 - Or withdrawable with primary fuses in a separate compartment, with bushings and shutters to the connection compartment
- Make-proof earthing switch
 - With manual operating mechanism, optionally motor operating mechanism
 - In addition to the standard interlock: Earthing switch optionally lockable or electromagnetically interlocked against the withdrawable switching device
- Endurance class for earthing switch: M1, E1
- Surge arrester or surge limiter
 - Surge arrester for protecting the switchgear against external over-voltages
 - Surge limiter for protecting consumers against switching overvoltages while operating motors with starting currents ≤ 600 A.

Components



Vacuum circuit-breaker

Features

- According to IEC 62271-100, GB 1984
- Suitable for all switching duties
- Stored-energy spring mechanism with motor operating mechanism, manual operation always possible
- Racking the circuit-breaker with manual operating mechanism, optionally with motor operating mechanism
- 64-pole low-voltage plug connector between circuit-breaker and fixed part
- Maintenance-free operating mechanisms under normal climatic conditions and for the max. permissible number of operating cycles.



3AE vacuum circuit-breaker

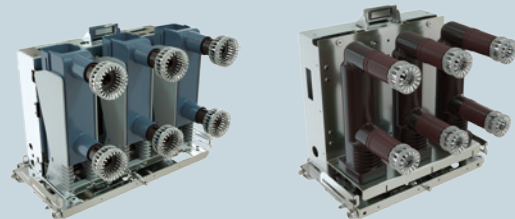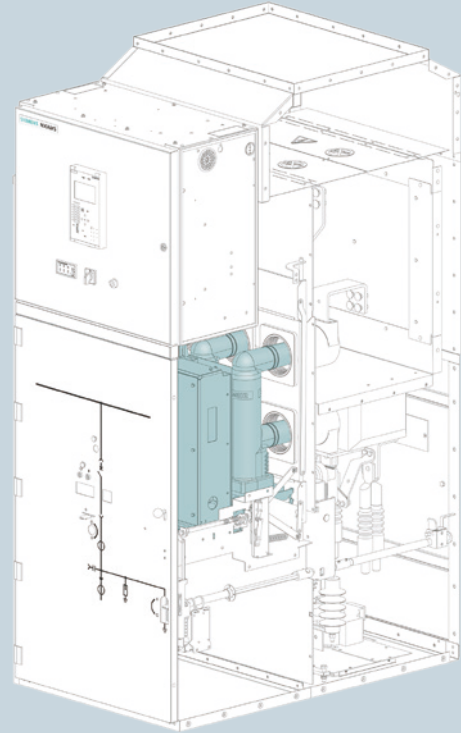

Different 3AE vacuum circuit-breakers on withdrawable part, with contacts



Electrical data for	NXAirS ≤ 12 kV
Rated operating voltage	up to 12 kV
Rated short-circuit breaking current	up to 40 kA
Rated short-time withstand current	up to 40 kA/4 s
Rated short-circuit making current	up to 100/104 kA
Rated peak withstand current	up to 100/104 kA
Rated normal current	up to 4000 A
Endurance class	E2, M2, C2

Features

- According to IEC 62271-106, GB/T 14808
- Suitable for operating consumers with high switching rates
- Short-circuit protection via 1 HV HRC fuse per phase
- Voltage supply of contactor coil via primary-fused control transformer or via external power supply
- Optional latching module for the contactor
- Racking the contactor via manual operating mechanism
- 64-pole low-voltage plug connector between contactor and fixed part
- Maintenance-free operating mechanisms under normal climatic conditions and for the max. permissible number of operating cycles
- Contact arms generally with silver-plated tulip contacts.



Withdrawable contactor and fuse combination equipment 3TM

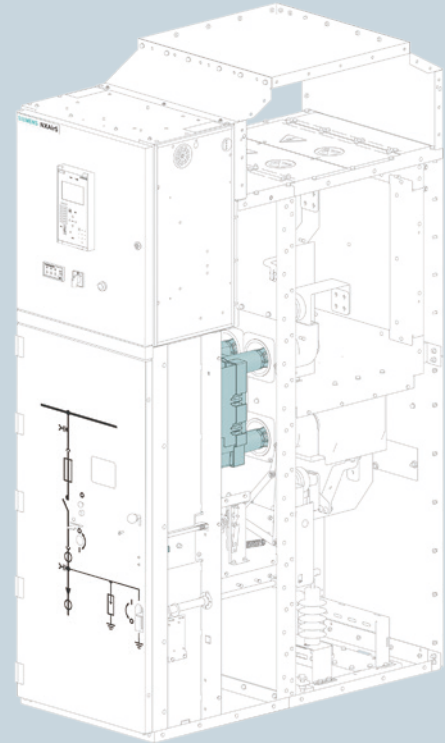

3TM vacuum contactor on withdrawable part, with contacts

Electrical data for	3TM43	3TM45
Rated operating voltage	12 kV	7.2 kV
Rated short-time withstand current ¹⁾	8 kA	8 kA
Rated normal current ²⁾	160 A	250 A
Number of operating cycles: of contactor, mechanical of contactor, electrical I_N	up to 1,000,000 up to 200,000	up to 1,000,000 up to 200,000

1) Can be used in switchgear with short-time withstand currents up to 50 kA due to the current limitation provided by HV HRC fuses.

2) Depending on the HV HRC fuses installed.

Components


Current transformers

Features

- Inductive indoor support-type current transformer in block-type design according to IEC 61869-2, GB 20840.2, standardized, available worldwide
 - Cast-resin insulated
 - Insulation class E
 - Narrow design
 - Option:
 - With coupling electrode for capacitive voltage presence indicator for block-type current transformers
 - Secondary multi ratio possible
- Current transformer with type test certificate and declaration of conformity.



Block-type current transformer

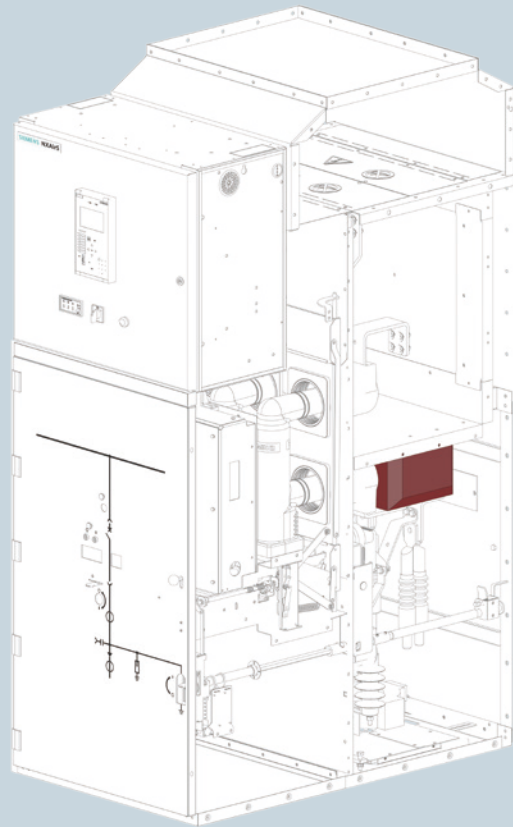


Electrical data for		
Operating voltage		12 kV
Rated primary current		up to 4000 A
Short-time thermal current		up to 50 kA
Duration of short-time current		max. 4 s
Rated peak withstand current		up to 104 kA
Number of secondary cores		up to 3
Secondary current		1 A or 5 A
Accuracy classes	Measuring	0.2 - 0.5, depending on the type of CT
	Protection	5P/30-10P/20, depending on the type of CT
Rating		up to 60 VA, depending on the type of CT

Features

- Inductive principle according to IEC 61869-3, GB 20840.3
 - Cast-resin insulated single-pole
 - Insulation class E
 - Secondary connection via screw-type terminals
 - Option:
 - With earth-fault winding
 - Double-pole voltage transformer



Voltage transformer, fixed-mounted

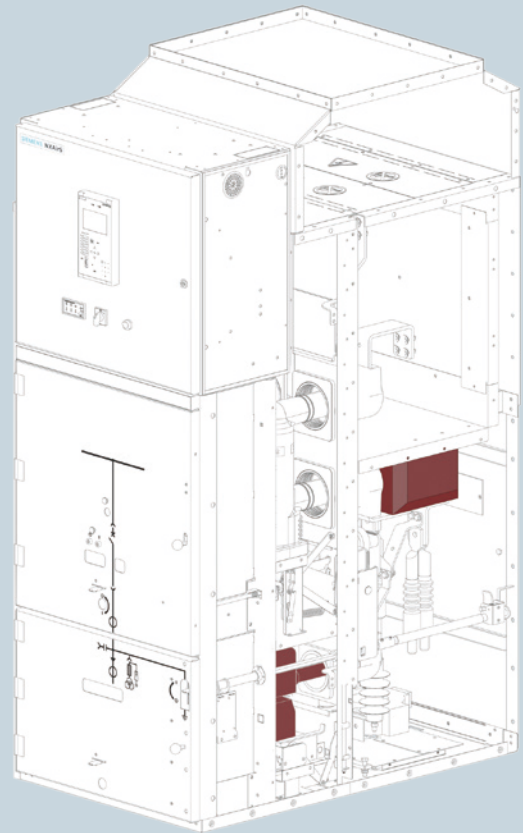

Voltage transformer, withdrawable-mounted

Electrical data for

Primary operating voltage	up to 12 kV
Secondary operating voltage	up to 100 V or up to $100 \text{ V} / \sqrt{3}$
Accuracy classes	0.2/0.5/1.0/3P/6P
Rating	up to 200 VA

Components


Low-voltage compartment

Features

- Low-voltage compartment for accommodation of all protection, control, measuring and metering equipment
- Partitioned safe-to-touch off the high-voltage part
- Low-voltage compartment can be removed
- Option: Higher low-voltage compartment with 980 mm height
- Low-voltage cables are flexible and protected by metal covers
- Connection of withdrawable part and panel wiring to low-voltage compartment via 64-pole, coded plug connectors
- Specific key for low voltage door.



Door of low-voltage compartment (example)

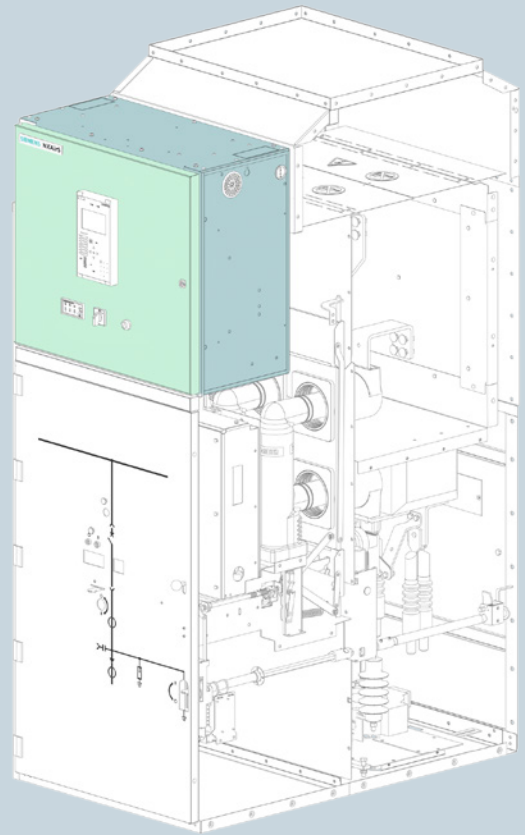

Description

- SIQuench is an active arc detection system by Siemens, which quenches the internal arc in a time span of less than 5 milliseconds.

Benefits

- Considerable reduction of pressure and arc energy
- Prevents thermal, contamination and toxicity effects from damaging the equipment with its surroundings
- Fast restart
- Minimization of switchgear downtimes and reduction of economic losses.

Design and function

- Basic components
 - SIQuench main switch unit
 - Controller
 - Optical sensors
 - Time-overcurrent protection
- Continuous monitoring of light and overcurrent; in the event of an internal arc, SIQuench earths the switchgear quickly by means of a controlled mechanical 3-phase short circuit
- Definitive breaking of the short-circuit current through the circuit-breaker of the incoming feeder.

Technical data


- Up to 12 kV, up to 40 kA
- Fast mechanical stored-energy spring mechanism
- Continuous self-monitoring
- 5 switching operations at full rated short-time withstand current (with peak withstand current)
- Maintenance-free for 20 years
- Service life of 30 years as a minimum.

Installation possibilities


- In top box at the busbar (fixed mounted)
- Factory-assembled and -tested.



SIQuench fixed-mounted at the busbar

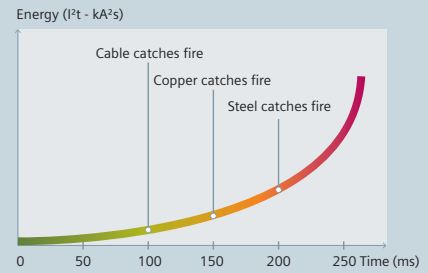

Damage caused by arc energy

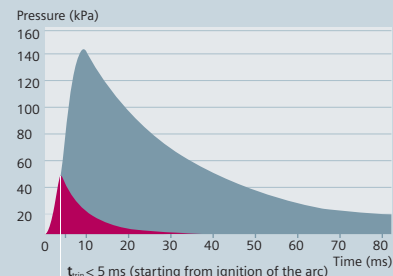

Sample pressure curve in a compartment for an arc current of 80 kA (peak) / 31.5 kA (r.m.s.)


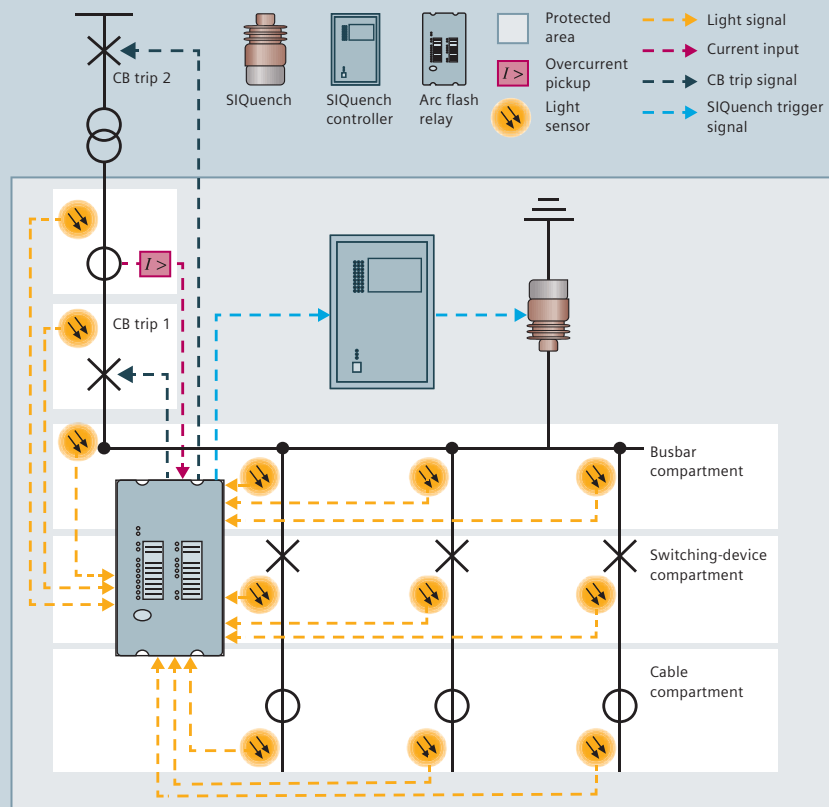


Illustration of the system integration in an exemplary arc protection application (one incoming feeder with single protection zone)

Technical data

Electrical data

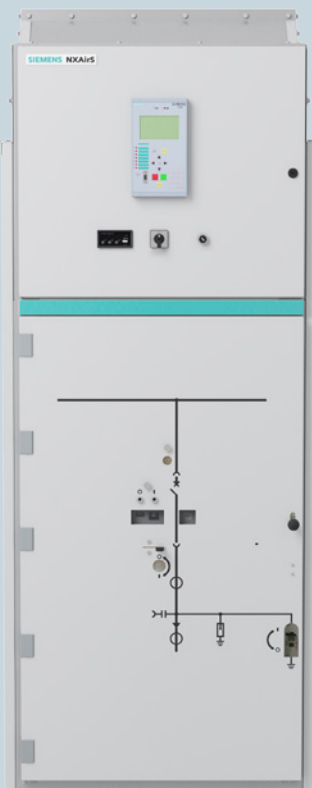

Up to 12 kV; 40 kA; 4000 A


Rated values up to 40 kA

Rated	kV	7.2	12
frequency	Hz	50 / 60	50 / 60
short-duration power-frequency withstand voltage (phase-to-phase, phase-to-earth)	kV	20 (32)	28 (42)
lightning impulse withstand voltage (phase-to-phase, phase-to-earth)	kV	60	75
short-circuit breaking current	max. kA	40	40
short-time withstand current, 4 s	max. kA	40	40
short-circuit making current ¹⁾	max. kA	100 / 104	100 / 104
peak withstand current ¹⁾	max. kA	100 / 104	100 / 104
normal current of busbar	max. A	4000	4000
normal current of feeders:			
With circuit-breaker	max. A	4000	4000
With contactor ²⁾	max. A	250	160
With disconnecter link	max. A	4000	4000
Bus sectionalizer	max. A	4000	4000
Busbar connection panel	max. A	4000	4000
Load-break switch and fuse combination panel	max. A	250	140

1) Values for 50 Hz: 100 kA

60 Hz: 104 kA


2) Current values dependent on HV HRC fuses

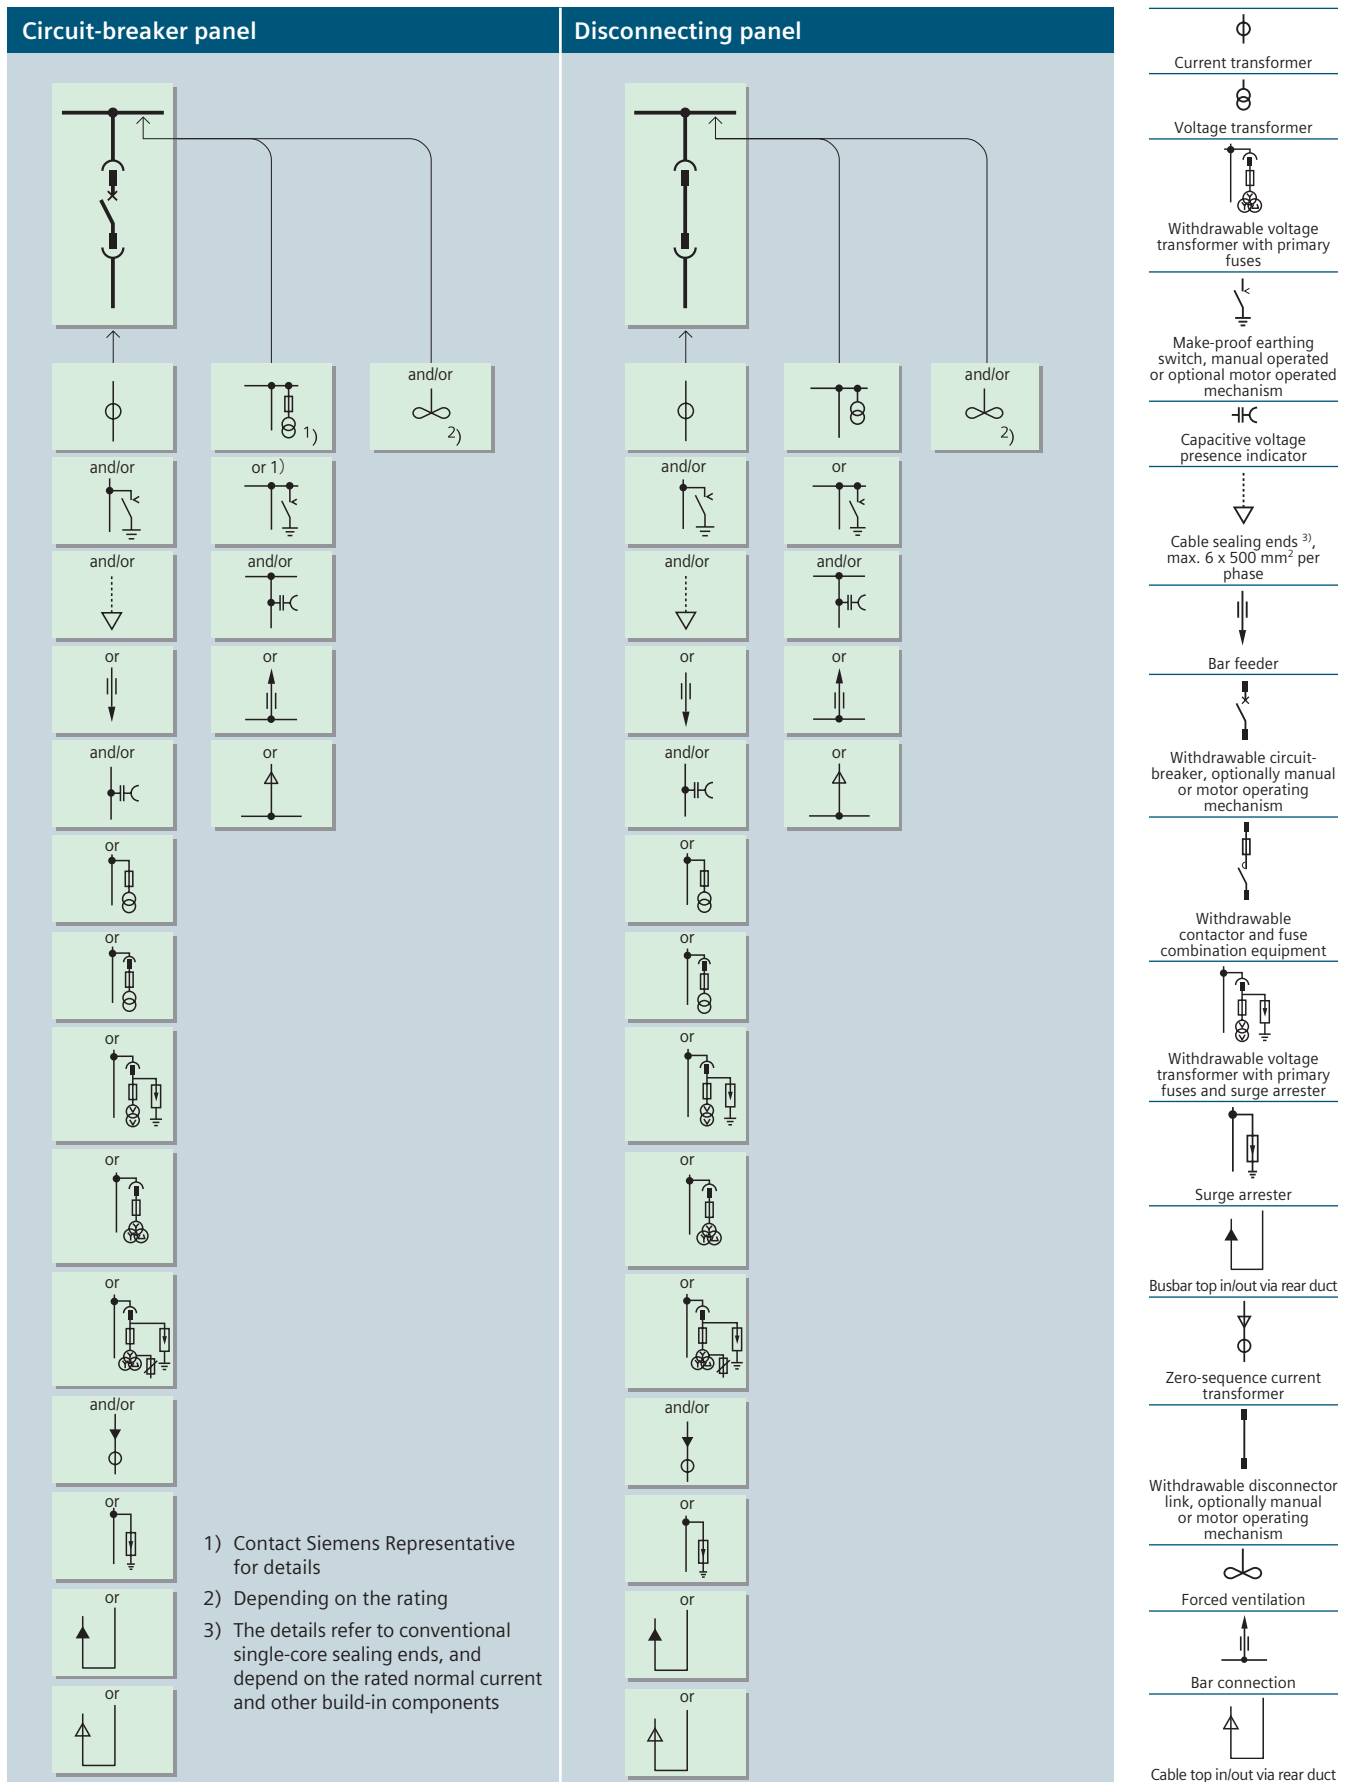


Technical data

Product range, switchgear panels


Bus sectionalizer (mirror-image installation also possible)

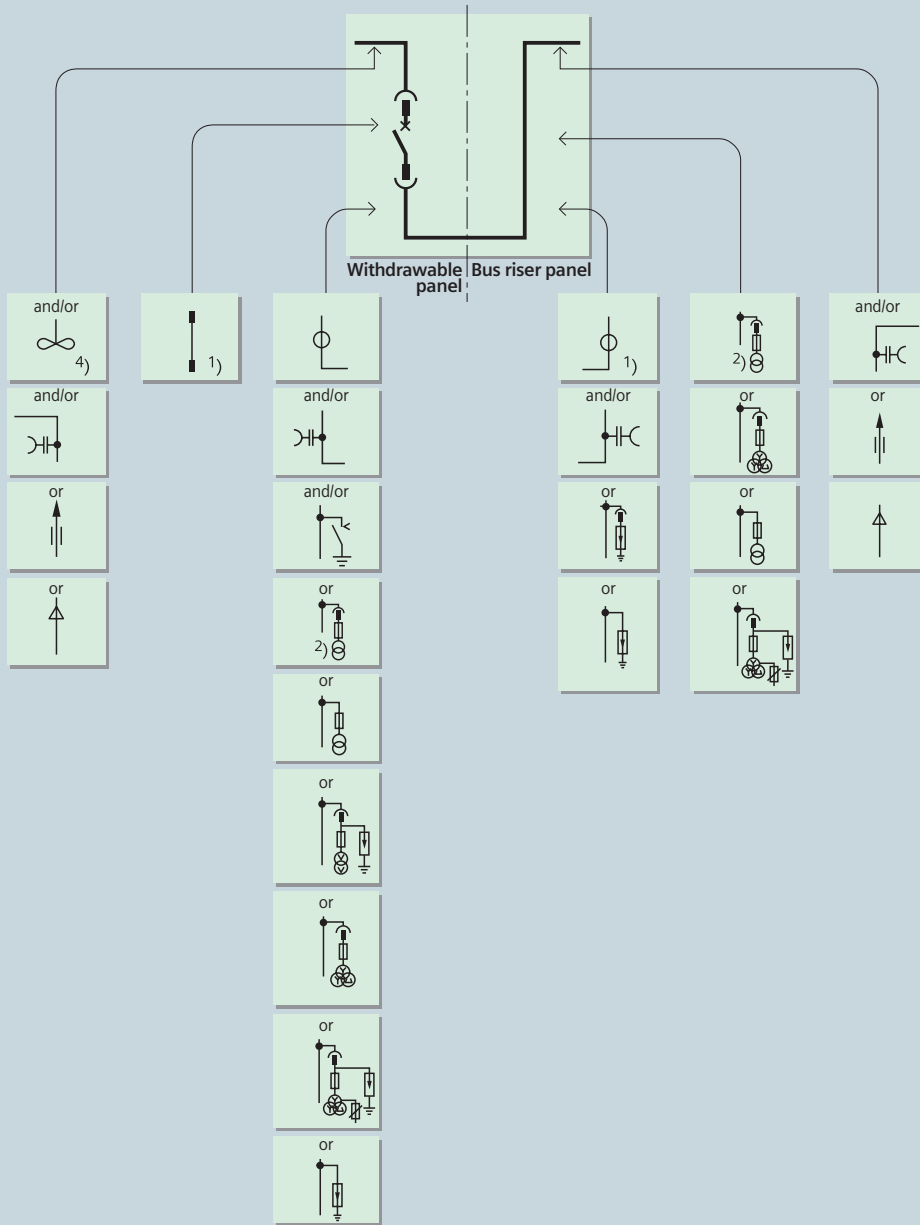


- 1) CT installation shall be combined with the withdrawable disconnecter link
- 2) Withdrawable metering unit
- 3) The details refer to conventional single-core sealing ends, and depend on the rated normal current and other build-in components
- 4) Depending on the rating

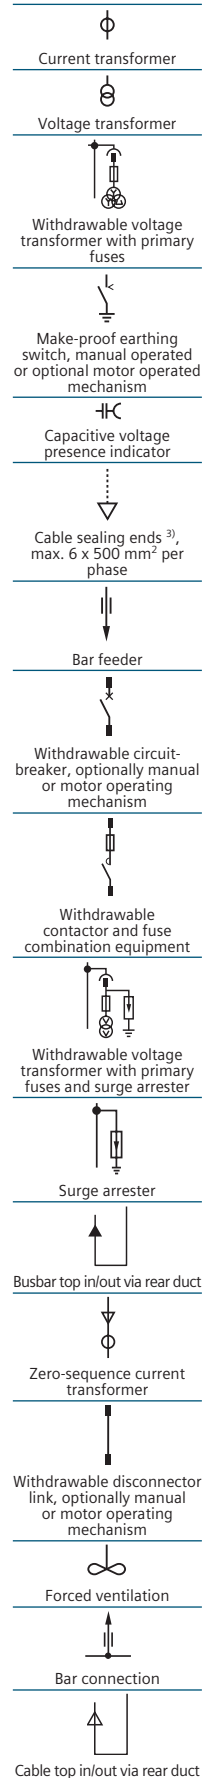

Bus sectionalizer (mirror-image installation also possible)

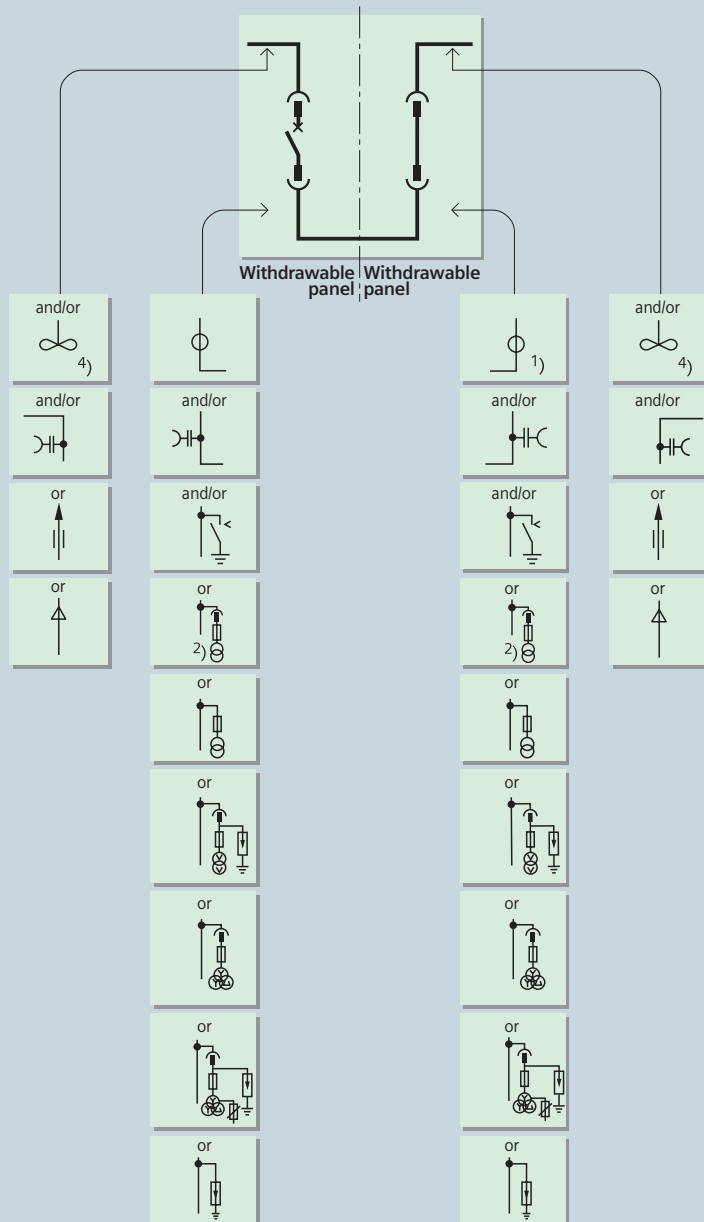


- 1) CT installation shall be combined with the withdrawable disconnecter link
- 2) Withdrawable metering unit
- 3) The details refer to conventional single-core sealing ends, and depend on the rated normal current and other build-in components
- 4) Depending on the rating

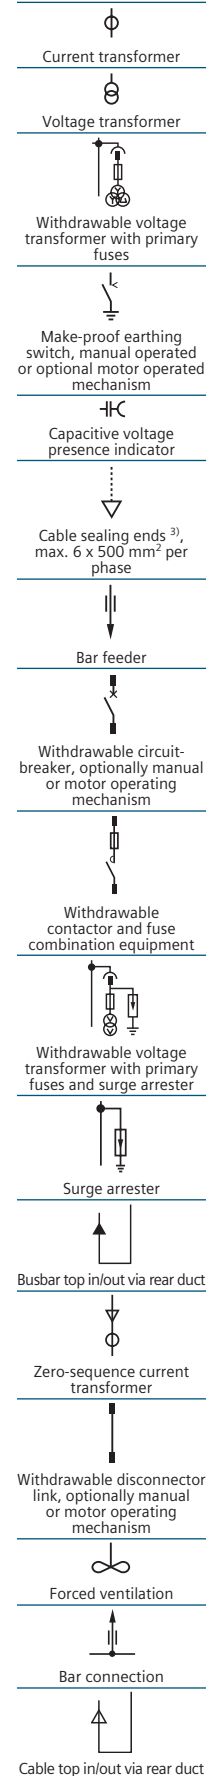


Technical data


Product range, switchgear panels

Bus sectionalizer (mirror-image installation also possible)

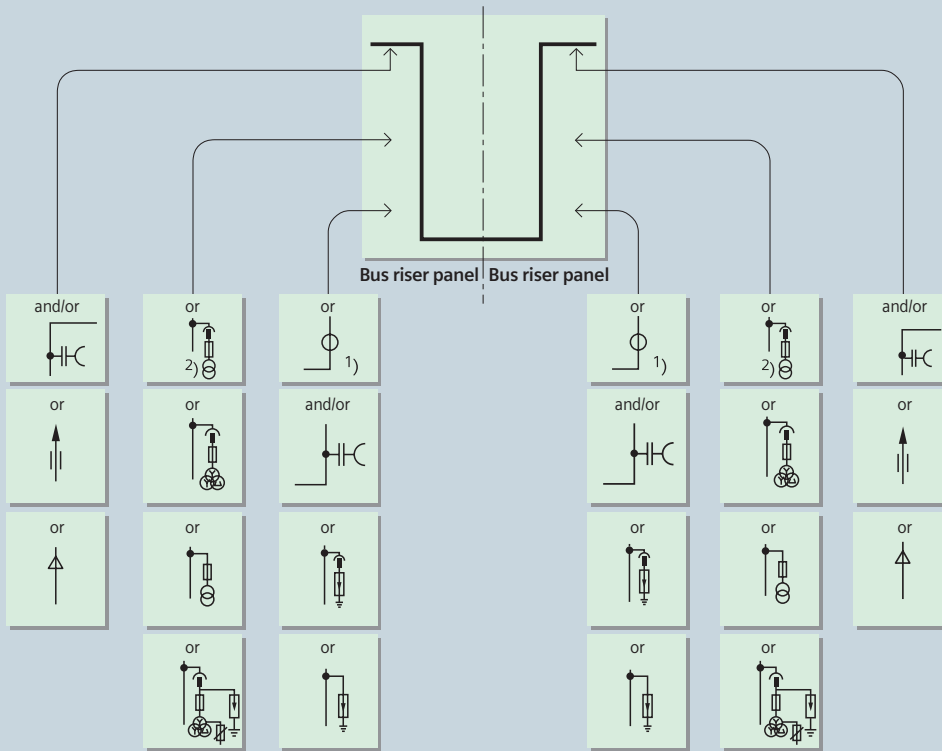


- 1) CT installation shall be combined with the withdrawable disconnector link
- 2) Withdrawable metering unit
- 3) The details refer to conventional single-core sealing ends, and depend on the rated normal current and other build-in components

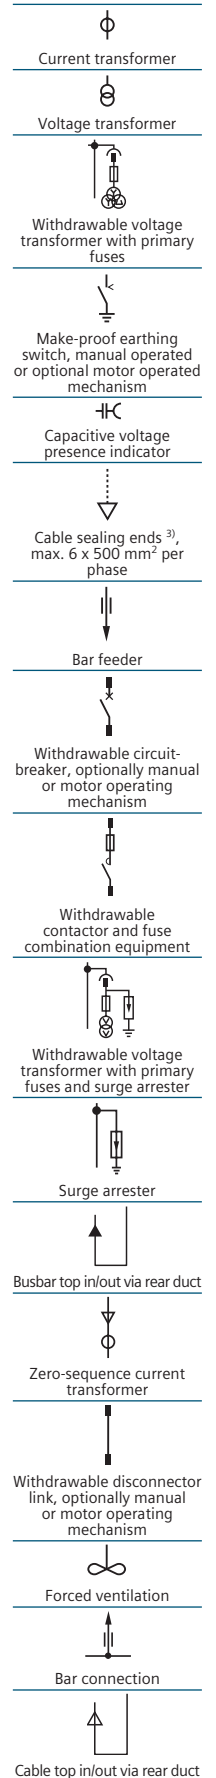


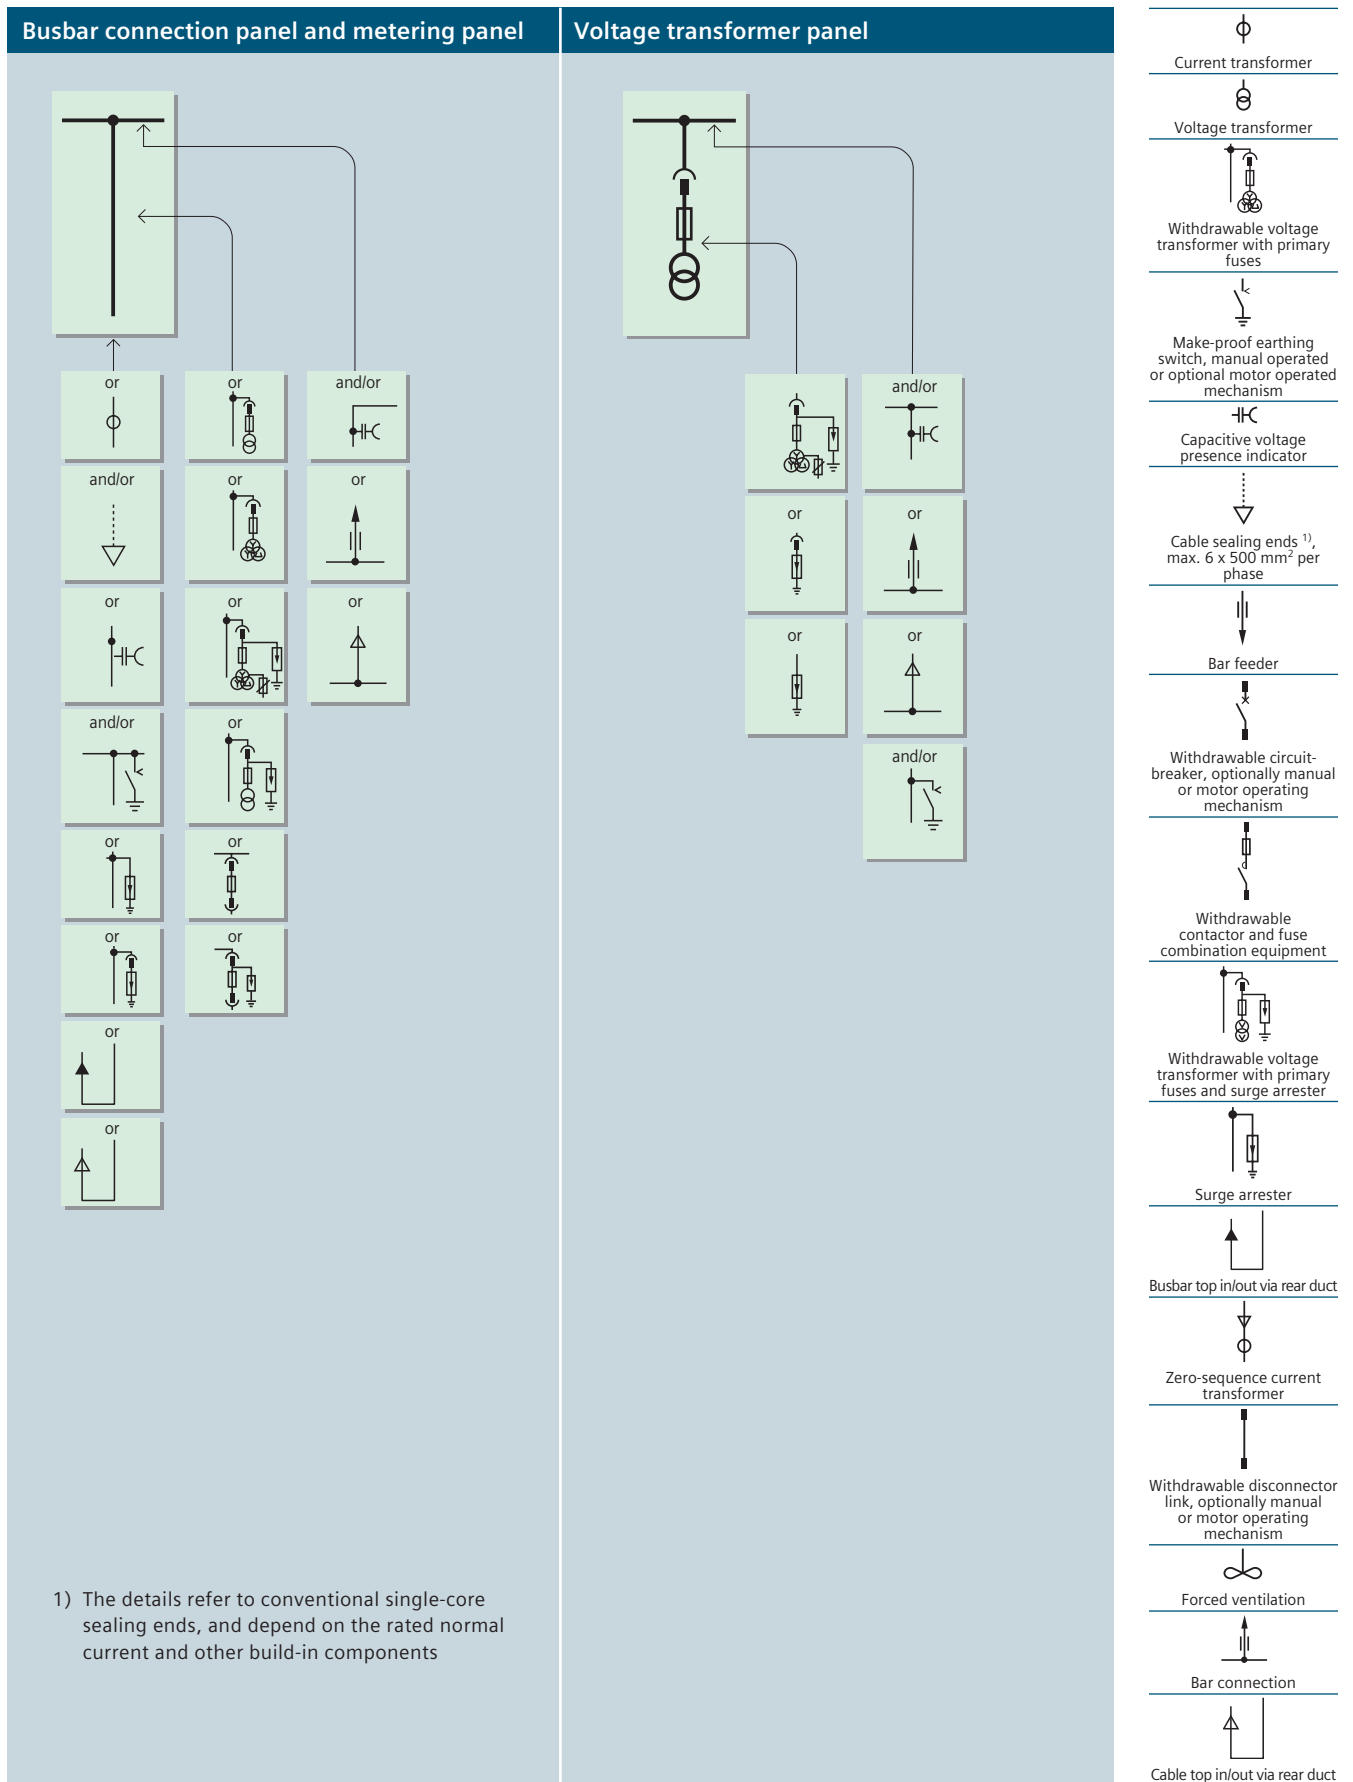

Technical data


Product range, switchgear panels

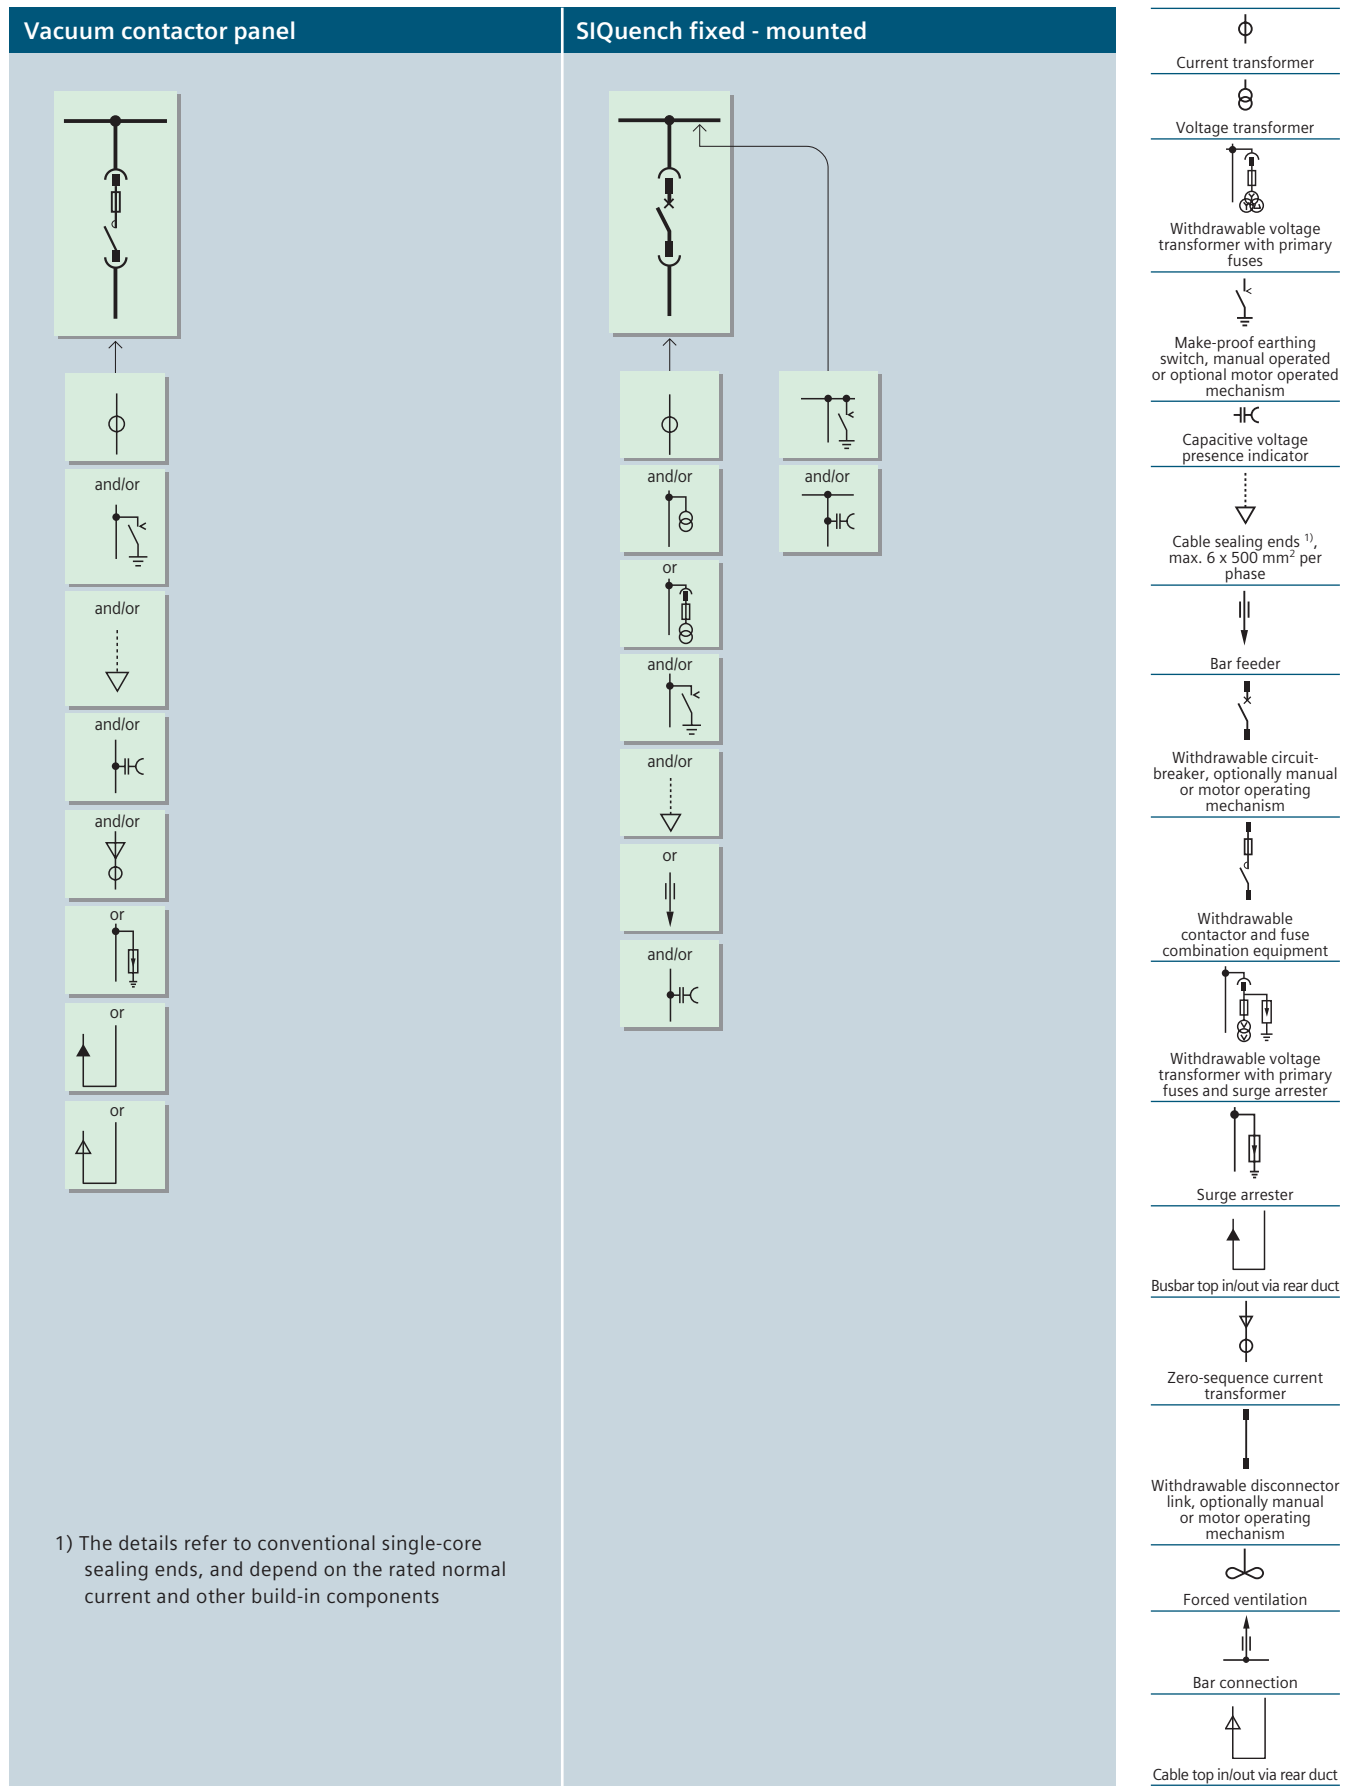

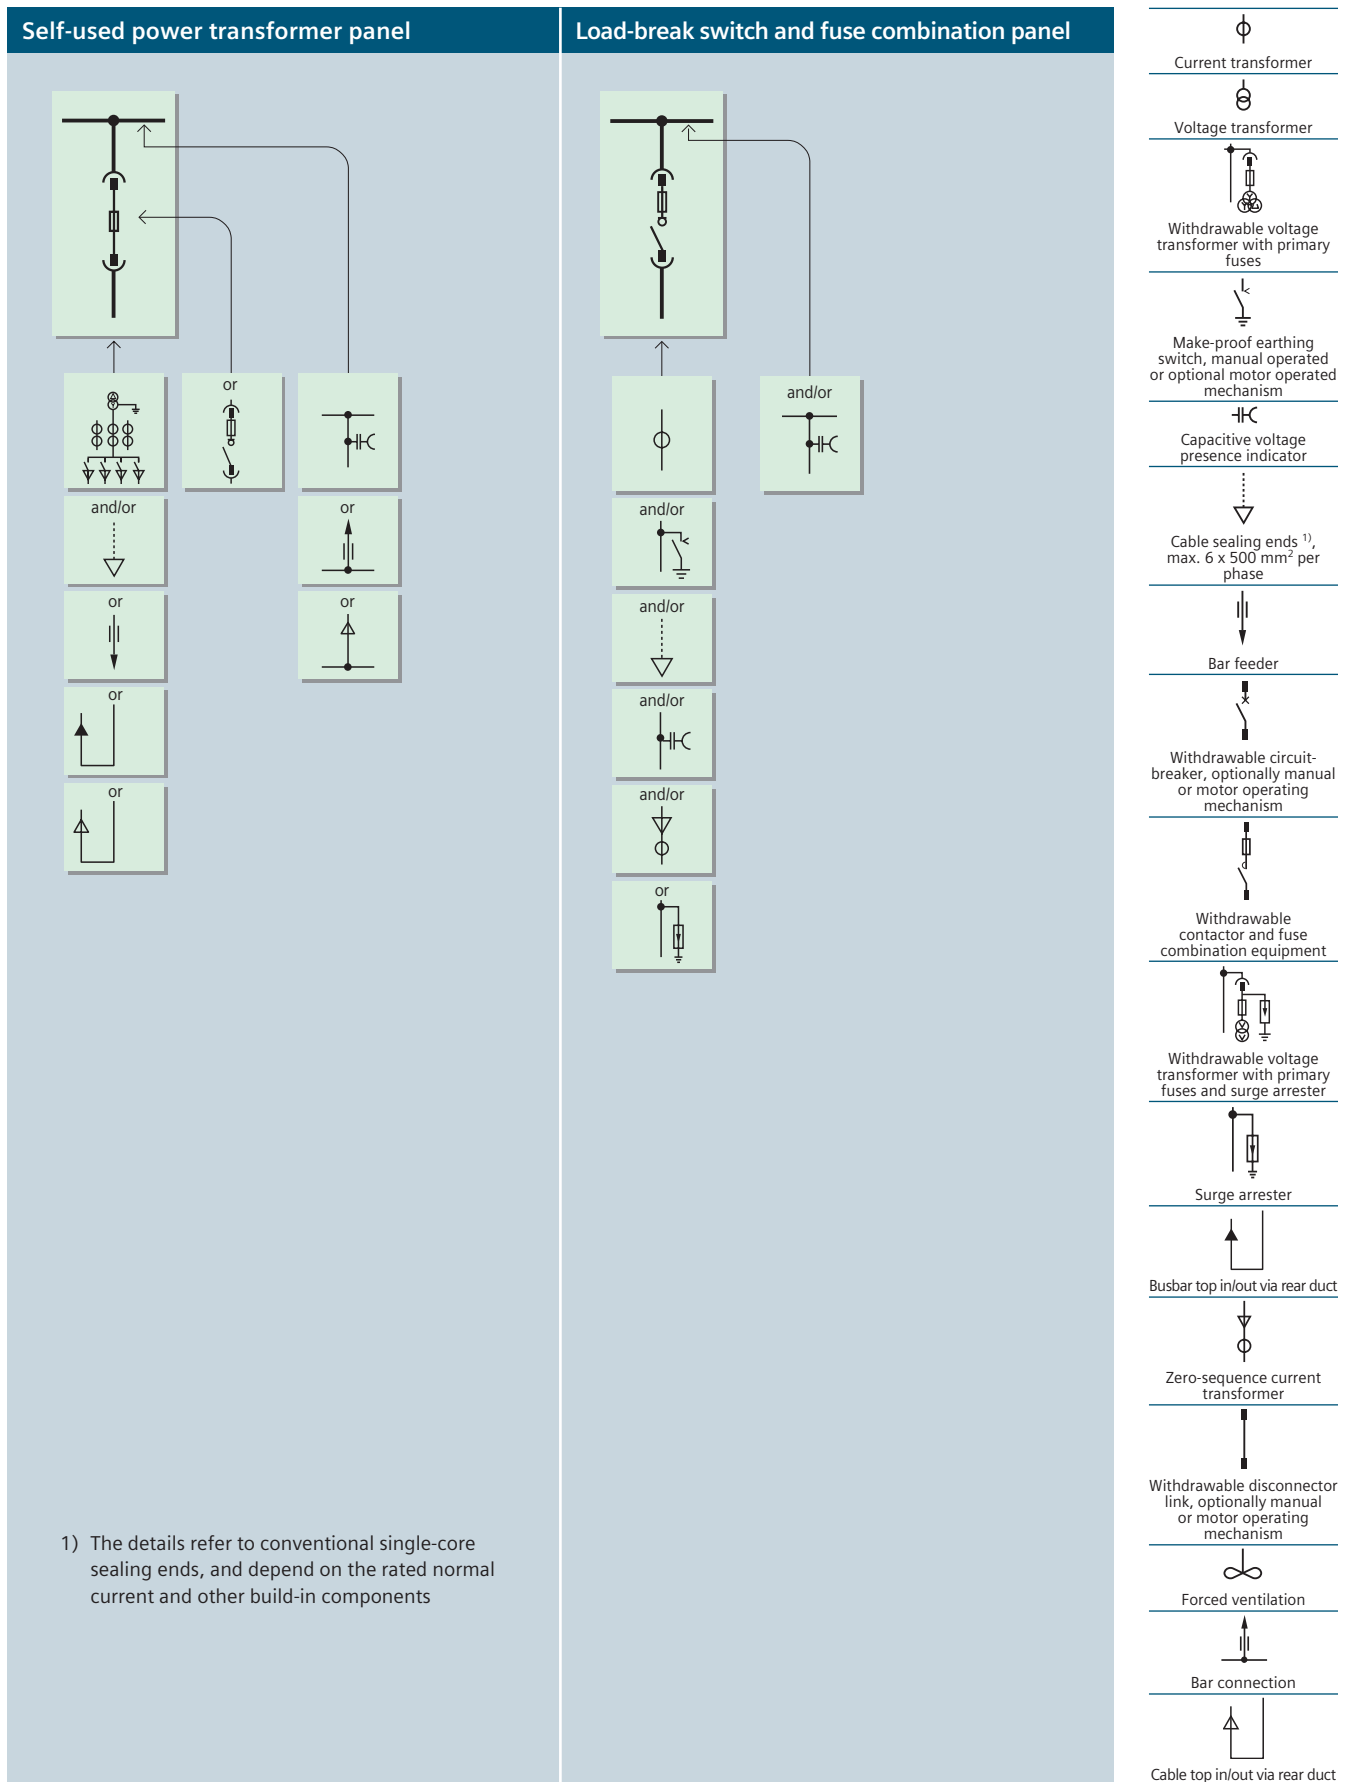

Technical data

Dimensions

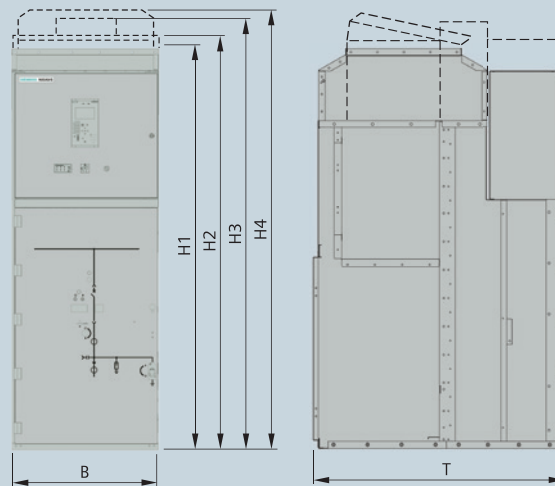

NXAirS ≤ 12 kV ; ≤ 40 kA ; ≤ 4000 A

		Panel type	Rated normal current	Short-time withstand current	
				≤ 31.5 kA	40 kA
Width in mm	B	Circuit-breaker panel, disconnecting panel	630 A 1250 A 1600 A 2000 A 2500 A 3150 A 4000 A	550 / 650 / 800 550 / 650 / 800 800 800 800 800 / 1000 ¹⁾ 1000 1000	800 800 800 800 800 800 / 1000 ¹⁾ 1000 1000
		Bus sectionalizer	1250 A 1250 A ~ 2500 A > 2500 A	2 x 550 / 800 2 x 800 / 1000 ¹⁾ 2 x 1000	2 x 800 2 x 800 / 1000 ¹⁾ 2 x 1000
		Metering panel	–	550 / 800	800
		Contactor panel	≤ 250 A ⁴⁾	650	650
		Load-break switch and fuse combination equipment panel	≤ 140 A ⁴⁾	800	800
		Self-used transformer panel	–	550 / 800 / 1000	800 / 1000
		Busbar connection and metering panel	–	550 / 800	550 / 800
Height mm	H1	Standard panel or standard panel with natural ventilation		2200	2200
	H2	With higher low-voltage compartment or additional compartment for busbar components		2350	2350
	H3	With forced ventilation		2380	2380
	H4	With optional arc absorber ²⁾		2400	2400
Depth mm	T ³⁾	Single-busbar, all panel types (except load-break switch and fuse combination equipment panel)		1350 / 1500	1350 / 1500
		550 mm width panel		1350	–
		Load-break switch and fuse combination equipment panel		1350	1500


1) 1000 mm depends on the rating

2) Number of absorbers depends on switchgear configuration


3) Rear duct with depth 150 mm / 300 mm / 450 mm is used for the special configuration

4) Depending on the HV HRC fuses installed and the rated voltage

Pressure relief out of the switchgear room through a pressure relief duct

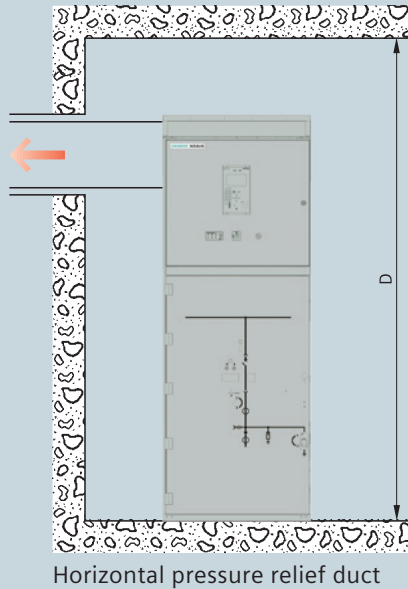

Pressure relief into the switchgear room through absorbers

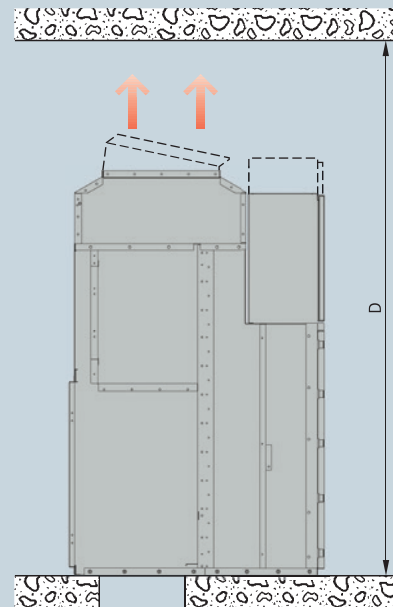


Type of pressure relief	Rated voltage	Ceiling height D in mm for short-circuit current		
		25 kA	31.5 kA	40 kA
Pressure relief into the switchgear room through absorbers	12 kV	≥ 2900	≥ 2900	≥ 2900
Pressure relief out of the switchgear room through a pressure relief duct	12 kV	≥ 2500	≥ 2500	≥ 2500
IP41/42	12 kV	2900	2900	2900
Width of control aisle E (min.) for panel replacement	12 kV	1800	1800	1800


Single-row arrangement (plan view) for single-busbar switchgear

For dimensions B (width) and T (depth), see table on Page 26. (unit, mm)

Switchgear free-standing arrangement with cable connection at the rear

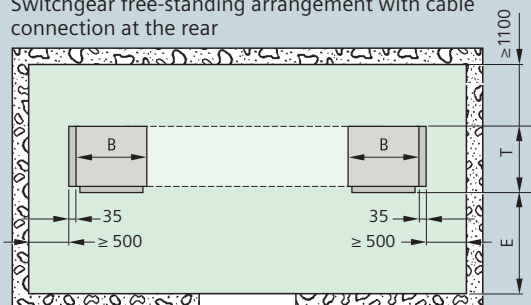

Switchgear wall-standing arrangement with cable connection at the front

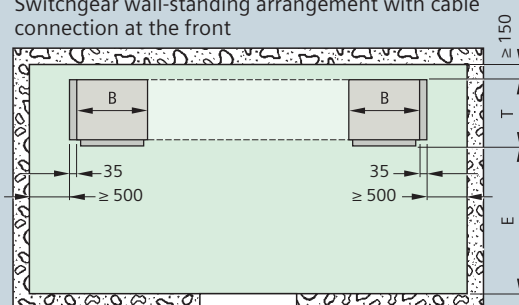

Recommended E value

Single row arrangement ≥ 1800 mm

Double rows arrangement ≥ 2500 mm

Please contact Siemens to know the details


Technical data

Typical for IP41/42

Features

- Special design for application in marine, offshore, data center and some other areas, based on the NXAirS standard product range
- Available up to 12 kV, up to 40 kA, and up to 4000 A
- Factory-assembled, metal-enclosed and type-tested switchgear according to IEC 62271-200
- Internal arc classification IAC A FLR up to 40 kA for 1 second
- Pressure relief into the switchgear room through absorbers and exhaust, with an optimized ceiling height of 2900 mm
- Degrees of protection IP41 or IP42 are possible

Dimensions

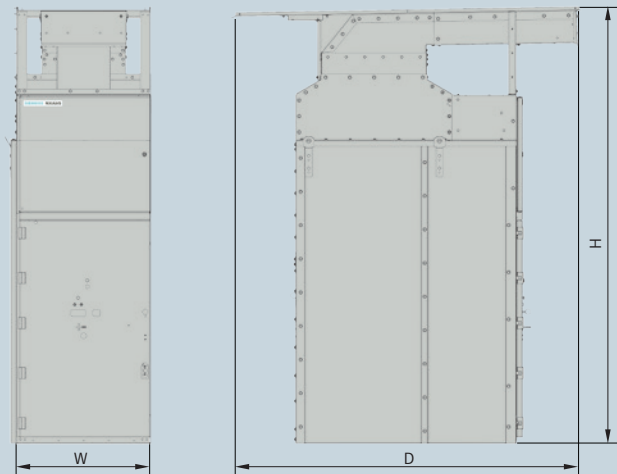

Switchgear with IP41/42 front / side view

		Panel type	Rated normal current	Short-time withstand current	
				≤ 31.5 kA	40 kA
Width mm	W	Circuit-breaker panel, disconnecting panel	630 A 1250 A 2500 A 3150 A 4000 A	550 / 650 / 800 550 / 650 / 800 800 / 1000 1000 1000	- 800 800 / 1000 1000 1000
Height mm	H	Standard panel with higher low-voltage compartment		2600	2600
Depth mm	D	Single busbar, all panel types with roof for IP41/42		2090	2090

Transport

NXAirS 12 kV switchgear is delivered in form of individual panels.

Please observe the following:

- Transport facilities on site
- Transport dimensions and transport weights
- Size of door openings in building.

Packing

Means of transport: Rail and truck

- Panels on pallets
- Open packing with PE protective foil.

Means of transport: Seafreight

- Panels on pallets
- Sealed in PE protective foil, with closed wooden crate
- With desiccant bags
- With sealed wooden base
- Max. storage time: 6 months.

Means of transport: Airfreight

- Panels on pallets
- In wooden latticed crate with sealed upper and lower PE protective foil.

These transport and packing stipulations apply to the Complete NXAirS product family. More information to transport dimensions/transport weights is given in the corresponding table and may change depending on the project.

NXAirS up to 40 kA

Transport dimensions, transport weights ¹⁾ for individual panels ¹⁾			
Panel widths	Transport dimensions Width x Height x Depth	Transport weight	
		with packing	without packing
mm	mm x mm x mm	~ kg	~ kg
Transport by rail or truck			
1 x 550	900 x 2440 x 1700	800	770
1 x 650	1100 x 2420 x 1700	980	950
1 x 800	1100 x 2420 x 1700	1240	1200
1 x 1000	1300 x 2700 x (1700 / 2000)	1390	1350
1 x 1000 ²⁾	1300 x 2700 x (1700 / 2000)	1690	1650
Transport by seafreight or airfreight			
1 x 550	900 x 2440 x 1700	900	770
1 x 650	1100 x 2420 x 1700	1080	950
1 x 800	1100 x 2420 x 1700	1350	1200
1 x 1000	1300 x 2700 x (1700 / 2000)	1510	1350
1 x 1000 ²⁾	1300 x 2700 x (1700 / 2000)	1810	1650

1) Average values depending on the degree to which panels are equipped

2) 4000 A panels (with forced ventilation) and 3150 A panels

Standards

Standards, specifications, guidelines

Type of service location

The switchgear can be used as indoor installation according to IEC 61936.1 (Power Installations exceeding AC 1 kV) and VDE 0101

- Outside lockable electrical service locations at places which are not accessible to the public. Enclosures of switchgear can only be removed with tools
- In lockable electrical service locations. A lockable electrical service location is a place outdoors or indoors that is reserved exclusively for housing electrical equipment and which is kept under lock and key. Access is restricted to authorized personnel and persons who have been properly instructed in electrical engineering. Untrained or unskilled persons may only enter under the supervision of authorized personnel or properly instructed persons.

Dielectric strength

- The dielectric strength is verified by testing the switchgear with rated values of short-duration power-frequency withstand voltage and lightning impulse withstand voltage according to IEC 62271-1 and GB/T 11022 (see table "Dielectric strength").
- The rated values are referred to sea level and to normal atmospheric conditions (1013 hPa, 20 °C, 11 g/m³ water content according to IEC 60071 and GB 311.1).
- The dielectric strength decreases with increasing altitude. For site altitudes above 1000 m (above sea level) the standards do not provide any guidelines for the insulation rating, but leave this to the scope of special agreements.
- Site altitude
 - As the altitude increases, the dielectric strength of insulation in air decreases due to the decreasing air density. This reduction is permitted up to a site altitude of 1000 m according to IEC and GB.
 - For site altitudes above 1000 m, a higher insulation level must be selected. It results from the multiplication of the rated insulation level for 0 to 1000 m with the altitude correction factor K_a .

Standards

The switchgear complies with the relevant standards and specifications applicable at the time of type tests.

In accordance with the harmonization agreement reached by the countries of the European Union, their national specifications conform to the IEC standard.


The switchgear NXAirS optional conforms to the GB standard.

Table – Dielectric strength

Rated voltage (r.m.s. value)	kV	7.2	12
Rated short-duration power-frequency withstand voltage (r.m.s. value)			
– Between phases and to earth	kV	20 (30)	28 (42)
– Across isolating distances	kV	23 (34)	32 (48)
Rated lightning impulse withstand voltage (peak value)			
– Between phases and to earth	kV	60	75
– Across isolating distances	kV	70	85

Altitude correction factor K_a

For site altitudes above 1000 m, the altitude correction factor K_a is recommended, depending on the site altitude above sea level.

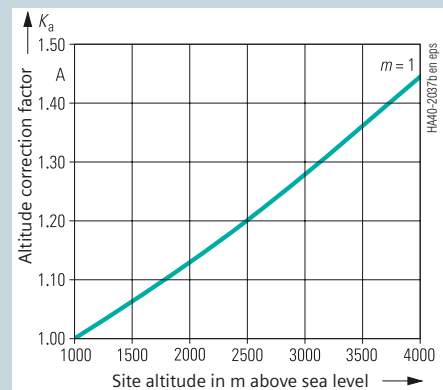

Rated short-duration power-frequency withstand voltage to be selected for site altitudes > 1000 m
 \geq Rated short-duration power-frequency withstand voltage up to ≤ 1000 m $\cdot K_a$

Rated lightning impulse withstand voltage to be selected for site altitudes > 1000 m
 \geq Rated lightning impulse withstand voltage up to ≤ 1000 m $\cdot K_a$

Example:
 1500 m site altitude above sea level,
 12 kV switchgear rated voltage,
 75 kV rated lightning impulse withstand voltage
 Rated lightning impulse withstand voltage to be selected =
 75 kV \times 1.063 \approx 80 kV

Result:

According to the above table, switchgear for a rated voltage of 12 kV with a rated lightning impulse withstand voltage of 85 kV for 2000 m application is to be selected.

Overview of standards

		IEC standard	GB standard
Switchgear	NXAirS	IEC 62271-1 IEC 62271-200	GB/T 11022 GB 3906
Devices	Circuit-breakers	IEC 62271-100	GB 1984
	Vacuum contactors	IEC 62271-106	GB/T 14808
	Disconnectors and earthing switches	IEC 62271-102	GB 1985
	Switch-disconnectors	IEC 62271-103	GB/T 3804
	Switch-disconnector / fuse combination	IEC 62271-105	GB/T 16926
	HV HRC fuses	IEC 60282-1	GB/T 15166.2
Degree of protection	Voltage detecting systems	IEC 61243-5	-
	IP-Code	IEC 60529	GB/T 4208
Insulation	IK-Code	IEC 62262	GB/T 20138
	–	IEC 60071	GB 311.1
Instrument transformers	–	IEC 61869-1	–
	Current transformers	IEC 61869-2	GB 20840.2
	Voltage transformers	IEC 61869-3	GB 20840.3
Installation, erection	–	IEC 61936-1	GB 36271.1

Current carrying capacity

- According to IEC 62271-200 or IEC 62271-1, GB 11022 or GB 3906 the rated normal current refers to the following ambient air temperatures:
 - Maximum of 24-hour mean + 35 °C
 - Maximum + 40 °C
- The current carrying capacity of the panels and busbars depends on the ambient air temperature outside the enclosure.

Internal arc classifications

- Protection of operating personnel by means of tests for verifying the internal arc classification
- Internal arcing tests must be performed in accordance with IEC 62271-200 / GB 3906
- Definition of criteria:
 - Criterion 1:
Correctly secured doors and covers do not open, limited deformations are accepted.
 - Criterion 2:
No fragmentation of the enclosure, no projection of small parts above 60 g
 - Criterion 3:
No holes in accessible sides up to a height of 2 m
 - Criterion 4:
No ignition of indicators due to hot gases
 - Criterion 5:
The enclosure remains connected to its earthing point.
- Beyond the standards mentioned above, NXAirS switchgear up to 40 kA/1 s is optionally provided with confinement of an internal arc to the respective compartment.

Seismic capacity (option)

NXAirS switchgear can be upgraded for regions at risk from earthquakes.

For upgrading, earthquake qualification testing has been carried out in accordance with the following standards:

- IEC 62271-2
High-voltage switchgear and controlgear - Part 2: Seismic qualification for rated voltages of 72,5 kV and above
- IEC 62271-200
High-voltage switchgear and controlgear - Part 200: AC metal-enclosed switchgear and controlgear for rated voltages above 1 kV and up to and including 52 kV
- GB/T 13540
Seismic qualification for high voltage switchgear and controlgear
- GB 3906
Alternating-current metal-enclosed switchgear and controlgear for rated voltages above 3.6 kV and up to and including 40.5 kV

Color of the panel front

RAL 7035 (light gray).

Climate and environmental influences

The NXAirS switchgear is suitable for application in indoor installations under normal operating conditions as defined in the standard IEC 62271-1 and GB 11022.

- Temperature -5°C ~ +55°C
-25°C ~ +55°C ¹⁾ (optional)
- Relative air humidity Mean value over 24 hours 1): ≤ 95 %
Mean value over 1 month: ≤ 90 %
- Condensation Occasionally
Frequently
- Site altitude Altitude correction to be considered (see page 30)
- No significant pollution of the ambient air (dust, gases, vapors, salts).

Recycling

The switchgear can be recycled in ecological manner in compliance with existing legislation. Auxiliary devices such as short-circuit indicators have to be recycled as electronic scrap.

Batteries have to be recycled professionally.

Terms

"Make-proof earthing switches" are earthing switches with short-circuit making capacity according to

- IEC 62271-102
- GB 1985

Protection against solid foreign objects, electric shock and water

NXAirS switchgear fulfills according to the standards

IEC 62271-1	GB 11022
IEC 62271-200	GB 3906
IEC 60529	GB 4208
IEC 62262	GB/T 20138

the following degrees of protection:

Switchgear panel	NXAirS ≤ 12 kV
Degree of protection for the enclosure optionally	IP3X IP4X, IP41, IP42
Degree of protection for the partitions	IP2X
Degree of protection for the enclosure against mechanical impacts from outside	IK07

For secondary devices in the low-voltage door, the stipulations of the IP degree of protection apply according to the definitions for the switchgear enclosure.

¹⁾ Secondary devices (e.g. protection devices, meters, measuring transducers, etc.) must be suitable for the given operating conditions

Published by
Siemens Ltd., China

Siemens Ltd., China
Smart Infrastructure
Distribution Systems
299, Tianning Road, Min Hang District
200245 SHANGHAI, China
Siemens Switchgear Limited Shanghai
298, Tianning Road, Min Hang District
200245 SHANGHAI, China

For further information please contact
Our Customer Support Center
Hotline: 400 616 2020

Order No.: EMDS-B80072-00-5DCN
1702-SH906628-07201

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

NXAirS and SION are registered trademarks of Siemens AG. Any unauthorized use is prohibited. All other designations in this document may represent trademarks whose use by third parties for their own purposes may violate the proprietary rights of the owner.

Scan the QR code
to know more
about information
of Distribution
Systems

